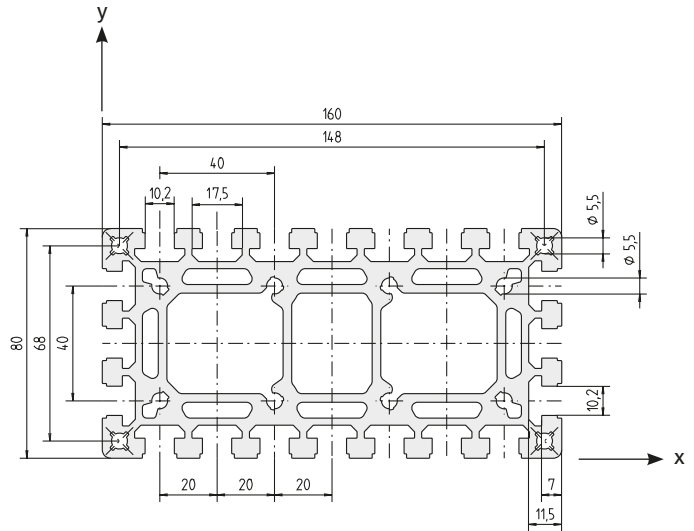



**F-80x160**


Code No. Profile F-80x160			Anodised
4075000	Cut to size	max. 6000 mm	Clear
4075001	Bar	6000 mm	Clear

Area	4723	mm <sup>2</sup>
$I_x$	314.6	cm <sup>4</sup>
$I_y$	1126.9	cm <sup>4</sup>
$I_t$	254.5	cm <sup>4</sup>
$W_x$	77.4	cm <sup>3</sup>
$W_y$	140.9	cm <sup>3</sup>
Weight	12753	g/m

Connection	Connection to slot geometry	lot sizes	Code No.
	30	–	4336706
	40	–	4336702
	30	10, 20, 30... pcs	4316706
	40	10, 20, 30... pcs	4246702

For description of slot geometry, please see page 26

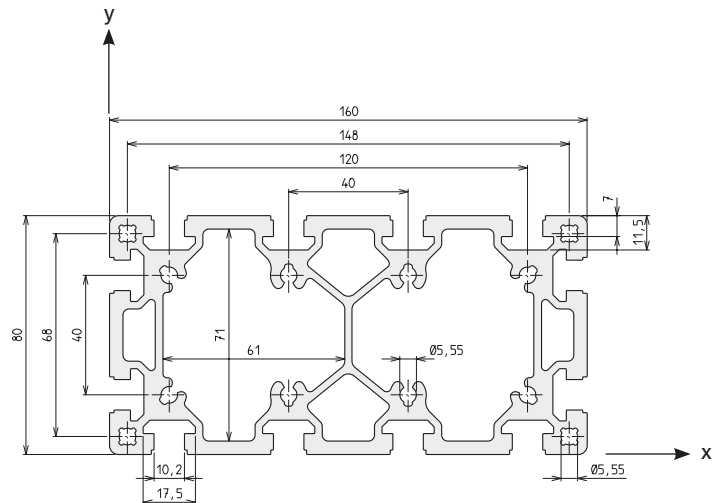**F-80x160-L**


Code No. F-80x160-L profile			Anodised
4925000	Cut to size	max. 6000 mm	Clear
4925001	Bar	6000 mm	Clear

Area	3714	mm <sup>2</sup>
$I_x$	291.3	cm <sup>4</sup>
$I_y$	1024.6	cm <sup>4</sup>
$I_t$	250.4	cm <sup>4</sup>
$W_x$	72.8	cm <sup>3</sup>
$W_y$	128.1	cm <sup>3</sup>
Weight	10028	g/m

Connection	Connection to slot geometry	lot sizes	Code No.
	30	–	4336706
	40	–	4336702
	30	10, 20, 30... pcs	4316706
	40	10, 20, 30... pcs	4246702

For description of slot geometry, please see page 26