




### F-50x100

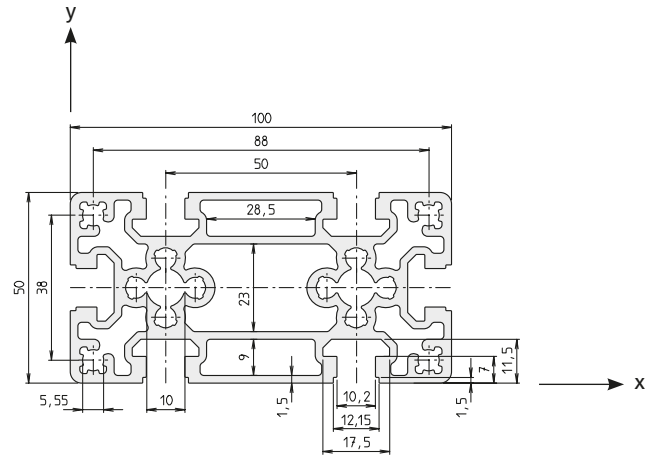


Code No. Profile F-50x100			Anodised
4665000	Cut to size	max. 6000 mm	Clear
4665001	Bar	6000 mm	Clear

Area	1743	mm <sup>2</sup>
I <sub>x</sub>	43.9	cm <sup>4</sup>
I <sub>y</sub>	180.8	cm <sup>4</sup>
I <sub>t</sub>	32.9	cm <sup>4</sup>
W <sub>x</sub>	17.6	cm <sup>3</sup>
W <sub>y</sub>	36.1	cm <sup>3</sup>
Weight	4707	g/m

Connection	Connection to slot geometry	lot sizes	Code No.
  long. + transverse	30	10, 20, 30... pcs	4086706
	40	10, 20, 30... pcs	4086702

For description of slot geometry, please see page 26

### F-50x200

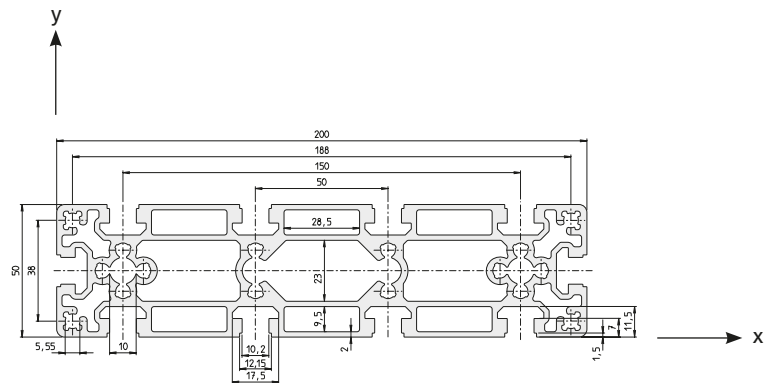

Code No. F-50x200 profile			Anodised
4675000	Cut to size	max. 6000 mm	Clear
4675001	Bar	6000 mm	Clear

Area	3024	mm <sup>2</sup>
I <sub>x</sub>	80.3	cm <sup>4</sup>
I <sub>y</sub>	1223.6	cm <sup>4</sup>
I <sub>t</sub>	98.9	cm <sup>4</sup>
W <sub>x</sub>	32.1	cm <sup>3</sup>
W <sub>y</sub>	122.4	cm <sup>3</sup>
Weight	8165	g/m

Connection	Connection to slot geometry	lot sizes	Code No.
 long.	30	10, 20, 30... pcs	4086706
	40	10, 20, 30... pcs	4086702
 transverse	30	10, 20, 30... pcs	4086706
	40	10, 20, 30... pcs	4086702

For description of slot geometry, please see page 26